

TT5000



RAYCHEM

CONNECT AND PROTECT

Fuel sensing cable

PRODUCT OVERVIEW



nVent RAYCHEM TraceTek TT5000 sensing cable detects the presence of liquid hydrocarbon fuels at any point along its length, yet does not react to the presence of water. Installed with an nVent RAYCHEM TraceTek alarm and locating module, the cable senses the liquid, triggers an alarm, and pinpoints the location of the leak within one meter.

Distributed sensing



TT5000 sensing cable provides distributed leak detection and location for a wide range of applications. The cable is available in a variety of lengths to provide as much coverage as needed.

Design flexibility

TT5000 sensing cable can be purchased in bulk form, cut to length in the field and joined using connector kits, or it can be obtained in standard lengths with connectors attached in the factory. These modular sensing cables may be connected in series to provide distributed monitoring for trenches, subfloors, and double-containment piping, or used individually for double-containment tanks, sumps, and small areas. TT5000 zone sensing cable—which comes with a factory-installed, heat-shrink end termination—is also available for small area coverage.

Advanced technology


nVent RAYCHEM radiation-crosslinking and conductive-polymer technology is used to make TT5000 sensing cable mechanically strong and chemically resistant. The core of the cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire. The core is encased in a conductive-polymer jacket and surrounded with a fluoropolymer braid. This rugged construction allows the cable to perform reliably in the most demanding environments.

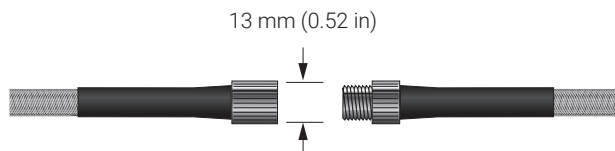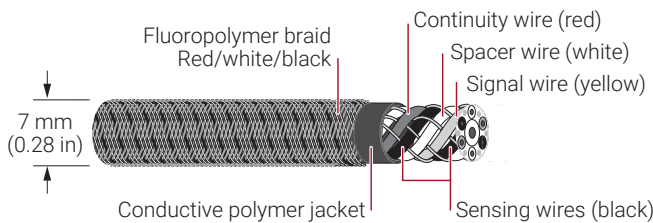

Drawing not to scale

Cable construction

ORDERING INFORMATION

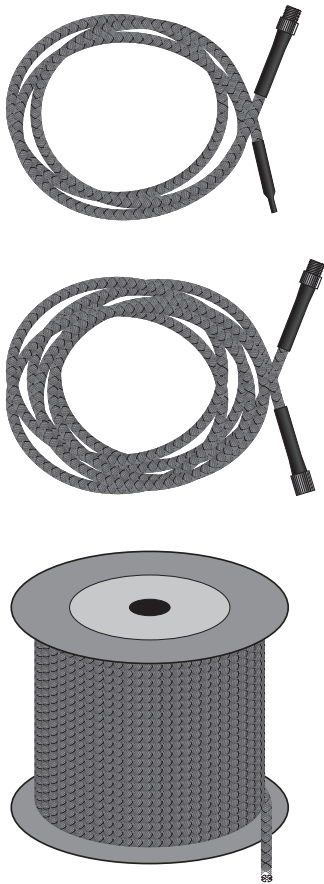

TT5000 zone sensing cable with factory-installed connector and end termination

| Catalog Number | Part Number | Description |
|------------------------|-------------|--|
| TT5000-1.5M/5FT-HSE-MC | 673739-000 | 1.5 m (5 ft) sensing cable with preinstalled heat-shrink end termination, prepared for zone system |

TT5000 modular sensing cable with factory-installed connectors

| Catalog Number | Part Number | Description |
|---------------------|-------------|-----------------------------|
| TT5000-0.3M/1FT-MC | 343347-000 | 0.3 m (1 ft) sensing cable |
| TT5000-1.5M/5FT-MC | 743599-000 | 1.5 m (5 ft) sensing cable |
| TT5000-3M/10FT-MC | 690609-000 | 3 m (10 ft) sensing cable |
| TT5000-4.5M/15FT-MC | 251851-000 | 4.5 m (15 ft) sensing cable |
| TT5000-7.5M/25FT-MC | 753845-000 | 7.5 m (25 ft) sensing cable |
| TT5000-10M/33FT-MC | P000000699 | 10 m (33 ft) sensing cable |
| TT5000-15M/50FT-MC | 770285-000 | 15 m (50 ft) sensing cable |
| TT5000-30M/100FT-MC | 260635-000 | 30 m (100 ft) sensing cable |

TT5000 bulk sensing cable for installation in double-containment piping (connector kits required)

| Catalog Number | Part Number | Description |
|----------------|-------------|---|
| TT5000-SC | 869309-000 | Bulk sensing cable on reel Minimum length: 30 m (100 ft) Maximum length: 240 m (800 ft) |

Connector kits (not shown)

| Catalog Number | Part Number | Description |
|---|-------------|---|
| TT5000-CK-MC-M/F (includes test tools) | 122499-000 | Components for five mated pairs of connectors |
| TT5000-CK-MC-M | 961207-000 | One pin-type connector |
| TT5000-CK-MC-F | 880841-000 | One socket-type connector |

Note: Refer to the Product Selection Guide (H55869) for other components of the nVent RAYCHEM TraceTek system.

PRODUCT CHARACTERISTICS

| | |
|-------------------------------|---|
| Cable diameter | 7 mm (0.28 in) nominal |
| Cable diameter with connector | 13 mm (0.52 in) nominal |
| Cable weight | 7.3 kg/100 m nominal (4.81 lb/100 ft nominal) |
| Fluoropolymer braid | Color—red, white and black |
| Operating temperature range | -20°C to 60°C (-4°F to 140°F) |
| Pull force limit | Not to exceed 22.7 kg (50 lb) |
| Bend radius | 50 mm (2 in) minimum |
| Pressure | Loads greater than 9 kg (20 lb) per linear inch at 20°C (68°F) may immediately trigger an alarm |
| Nonresettable | Must be replaced after exposure to hydrocarbon liquids |

CHEMICAL RESISTANCE

| | | |
|---|-------------------|-------|
| Cable functions normally after exposure in accordance with ASTM D 543 at 23°C (73°F) for seven days | Sulfuric acid | (10%) |
| | Hydrochloric acid | (10%) |
| | Nitric acid | (10%) |
| | Sodium hydroxide | (10%) |

WATER RESISTANCE

| | |
|------------------|--|
| Sensing cable | Less than 10 µA leakage when immersed in salt water for 90 days |
| Connector system | Less than 10 µA leakage when immersed in water at 10 psig for 24 hours |

RESPONSE TIME

| Represented Materials Detected | Typical Response Time at 20°C (68°F) |
|--------------------------------|--------------------------------------|
| Gasoline | 12 minutes |
| #1 diesel fuel | 60 minutes |
| #2 diesel fuel | 120 minutes |
| JP5 jet fuel | 70 minutes |
| JP8 jet fuel | 50 minutes |
| Jet-A jet fuel | 50 minutes |
| MTBE (Methyl Tert-Butyl Ether) | 45 minutes |
| Xylene | 20 minutes |

Notes:

- Response Time Test Method: "Test Procedures for Third Party Evaluation of Leak Detection Methods; Cable Sensor Liquid Contact Leak Detection Systems."
- Response times are affected by operating temperature. Consult factory for specific response times at other temperatures and in other liquids.

APPROVALS AND CERTIFICATIONS

TT5000 sensing cables are approved for installation in ordinary and hazardous areas when used in conjunction with approved nVent RAYCHEM TraceTek monitoring equipment and zener safety barriers when appropriate.

All nVent RAYCHEM TraceTek sensing cables are designated as "simple apparatus" and included in the approval certification for nVent RAYCHEM TraceTek monitoring instruments.

Consult the specific data sheets and approval certificates for the nVent RAYCHEM TraceTek TT-TS12, TTDM-128, TTSIM-1, TTSIM-1A, TTSIM-2, TTC-1 and TT-FLASHER-BE for application limitations and specific area approvals and certifications.



General Signaling Equipment
76LJ



The TT5000 sensing cables are FM approved as system interconnection cable in the TraceTek Diesel Leak Detection System when installed with a TraceTek Alarm and Locator Module and TT-FFS Fast Fuel Sensor to detect liquid hydrocarbon fuels.

North America

Tel +1.800.545.6258
Fax +1.800.527.5703
thermal.info@nVent.com

Europe, Middle East, Africa

Tel +32.16.213.511
Fax +32.16.213.603
thermal.info@nVent.com

Asia Pacific

Tel +86.21.2412.1688
Fax +86.21.5426.3167
cn.thermal.info@nVent.com

Latin America

Tel +1.713.868.4800
Fax +1.713.868.2333
thermal.info@nVent.com



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER