


Raychem HWAT-R2 SELF-REGULATING HEATING CABLE

For hot water temperature maintenance

Cable construction

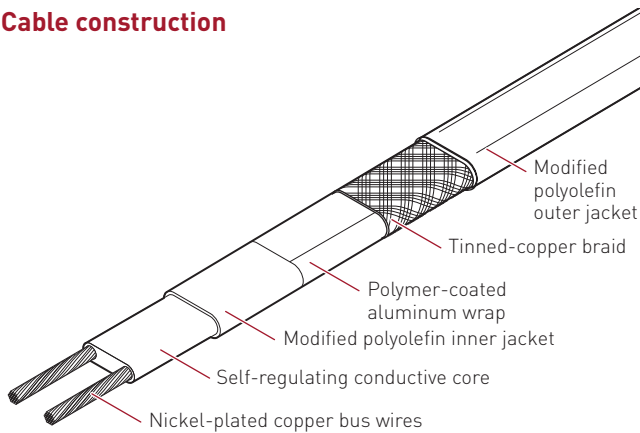

PRODUCT OVERVIEW

Raychem HWAT self-regulating heating cables are installed on hot water supply pipes underneath standard pipe insulation. The heating cable adjusts its power output to compensate for variations in water temperature and ambient temperature. The heating cable replaces supply-pipe heat losses at the point where the heat loss occurs, thereby providing continuous, energy-efficient, hot water temperature maintenance and eliminating the need for a recirculation system.

Simplified design

Single-pipe HWAT systems eliminate the need for designing complex recirculation systems, with their pumps, piping networks, and complicated flow balancing. Special cases, such as retrofits and multiple pressure zones, are simple to design.

Low installed cost

Installation of the HWAT system is simple. The heating cable can be cut to length, spliced, tee-branched, and terminated at the job site, reducing installation costs. Fewer plumbing components are needed; recirculation piping, pumps, and balancing valves are all eliminated.

Low operating cost

The HWAT system continuously maintains hot water temperature at every point along the supply pipe. Unlike conventional recirculation systems, HWAT systems do not require the overheating of supply water to allow for cooling. The HWAT system reduces the energy requirements of typical hot water systems with reduced heat loss from supply piping, no heat loss from recirculation piping, and no pump to run.

HWAT-ECO and ACS-30 controllers

The HWAT-ECO electronic controller is designed for operation with HWAT-R2 heating cable only. The HWAT-ECO provides flexible temperature control, energy savings, heat-up cycle function, BMS interface, and nine predefined programs that can be customized by the user. The DigiTrace ACS-30 controller also incorporates the features of the HWAT-ECO for large systems and multiple application control. The ACS-30 only supports HWAT-R2 heating cable for hot water temperature maintenance applications.

SPECIFICATIONS

Jacket	Modified polyolefin
Braid	Tinned copper
Bus wires	16 AWG nickel-plated copper
Supply voltage	208-277 V (277 V only when used with the ACS-30 Control System)
Minimum bend radius	0.5 in (12 mm)

PRODUCT CHARACTERISTICS (NOMINAL)

Catalog number	HWAT-R2
Jacket color	Red
Maintain temperature range*	105°F (40°C) to 140°F (60°C)
Weight	230 lbs/1000 ft (0.35 kg/m)
Dimensions	
Width	0.72 in (18 mm)
Thickness	0.38 in (10 mm)

* When designed in accordance with the HWAT System Product Selection and Design Guide

DESIGN AND INSTALLATION

For proper design and installation, use the Design section of the HWAT System Product Selection and Design Guide (H57538) and the HWAT System Installation and Operations Manual (H57548).

MAXIMUM CIRCUIT LENGTH FT (M)

	HWAT-R2	
	Breaker size	@208 V
	30 A	500(150)
	20 A	330(100)
	15 A	250 (75)

GROUND-FAULT PROTECTION

To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with Pentair Thermal Management requirements, agency certifications, and national electrical codes, 30-mA ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection.

APPROVALS



Pipe Heating Cable

HWAT heating cables are UL Listed, CSA Certified, and FM Approved when used with the appropriate agency-approved Raychem components and accessories



WWW.PENTAIRTHERMAL.COM

NORTH AMERICA

Tel: +1.800.545.6258
Fax: +1.800.527.5703
Tel: +1.650.216.1526
Fax: +1.650.474.7711
thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
Fax: +86.21.5426.2917
cn.thermal.info@pentair.com

LATIN AMERICA

Tel: +1.713.868.4800
Fax: +1.713.868.2333
thermal.info@pentair.com

Pentair, DigiTrace and HWAT and are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2004–2013 Pentair.