


TraceTek TT-TAR

TRACETEK ANALOG CURRENT TRANSDUCER

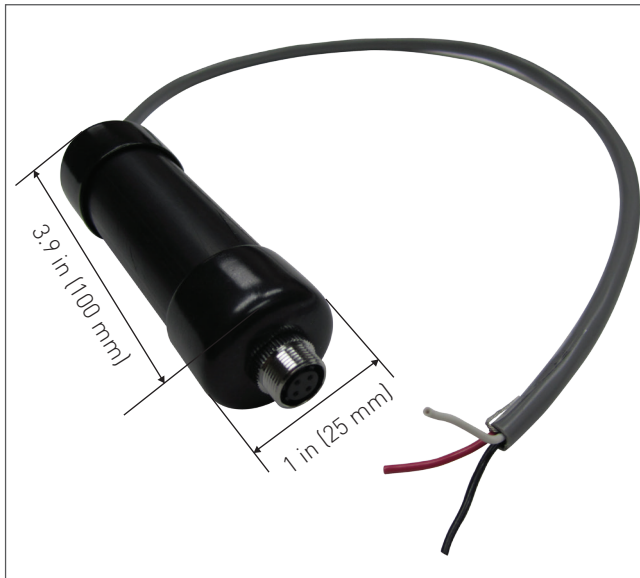

PRODUCT OVERVIEW


TT-TAR is a 2-wire, 4-20 mA current transducer for TraceTek sensor cable or TraceTek sensor probes. Virtually any of the TraceTek family of sensor cables and probes may be connected to the transducer. The TT-TAR is loop powered and no external source of power is required. For hazardous area installations, the TT-TAR is powered via an MTL5541 Repeater Power Supply (Galvanic Isolator). The amount of current that flows in the current loop between the MTL5541 and the TT-TAR is dependent on the condition/status of the sensor cable or sensor probes connected to the TT-TAR.

- 0 mA = Wire break between MTL5541 and TT-TAR
- 4 mA = Sensor cable/probe disconnected from TT-TAR or Sensor cable/probe damage
- 6-9 mA = Sensor cable/probe NORMAL
- > 18 mA = LEAK detected

TT-TAR does not indicate leak location. TT-TAR is designed to monitor point probes and limited amounts of sensor cable.

Key Points

- 2-wire, loop powered, 4-20 mA current transducer for TraceTek sensor cable and probes
- Approved for hazardous areas when energized via an MTL5541 Repeater Power Supply (Galvanic Isolator)
- Magnitude of current indicates sensor cable/probe status: NORMAL, LEAK DETECTED, CABLE BREAK

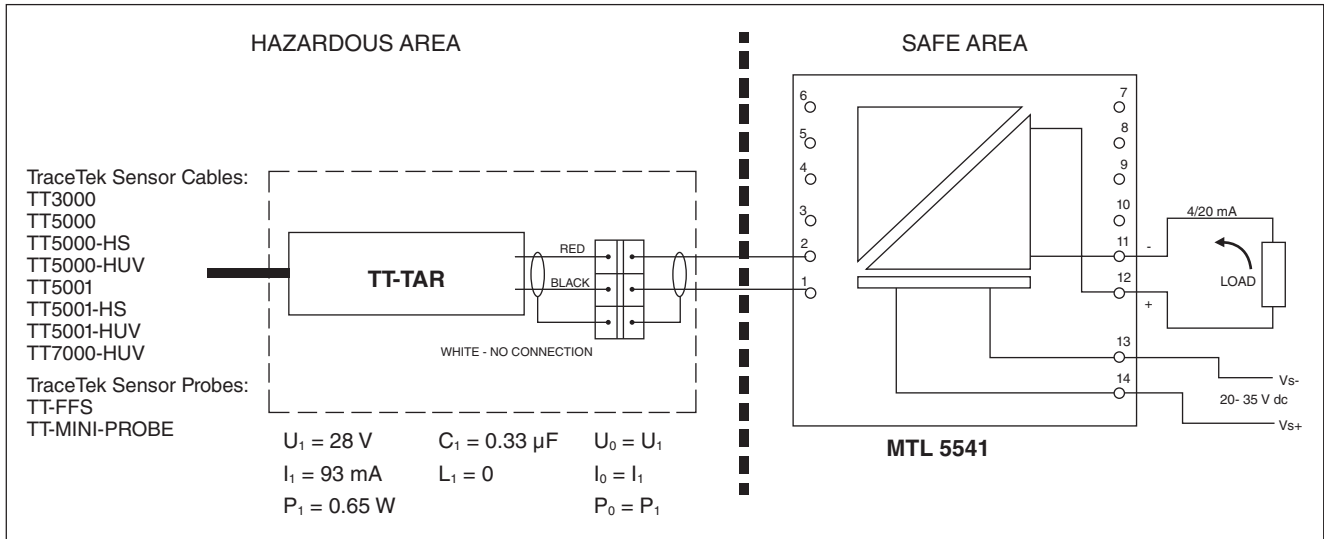

PRODUCT DATA AND RESTRICTIONS

Dimensions	Length 100 mm (3.9 in) x 25 mm (1.0 in) diameter
Weight	Approximately 80 gm (0.18 lb)
Sensor Connector	TraceTek MC series -female
Current Loop Wire	1 m (39 in) 3 conductor, 22 AWG (red, black, white*) *Note: white wire is not used for TT-TAR
Operating Temperature Range	-40°C to 60°C (-40°F to 140°F)
Maximum Sensor Cable Length	250 m (820 ft)
Maximum Number of TT-MINI-PROBES (Use TT-MBC-MC-BLK to connect more than one probe)	10
Maximum Number of TT-FFS Fast Fuel Probes (Use TT-MBC-MC-BLK to connect more than one probe)	4

APPROVALS

TT-TAR Unit Baseefa11ATEX0276X IECEX BAS 11.041X Ⓢ II1G Ex ia IIA T4 Ga [-40°C =< ta =< 60°C] IEC 60079-0:2011 IEC 60079-11:2011 EN 60079-11:2007	TT-TAR SYSTEM Baseefa11Y0277 IECEX BAS 11.0142 Ex ia IIA T4 IEC/EN 60079-25:2010
--	--



WWW.THERMAL.PENTAIR.COM

NORTH AMERICA

Tel: +1.800.545.6258
 Fax: +1.800.527.5703
 Tel: +1.650.216.1526
 Fax: +1.650.474.7215
 thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
 Fax: +32.16.213.603
 thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
 Fax: +86.21.5426.2917
 cn.thermal.info@pentair.com

LATIN AMERICA

Tel: +55.11.2588.1400
 Fax: +55.11.2588.1410
 thermal.info@pentair.com

Pentair and TraceTek are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2012–2013 Pentair.