
ALL PIPING AND TANKS MUST BE THOROUGHLY CLEANED OF SOLVENTS, WATER, PIPE DOPE, AND OILS BEFORE SENSING CABLES ARE INSTALLED.

NOTE CONNECTOR ORIENTATION MALE CONNECTOR PINS MUST POINT TOWARD CONTROL PANEL

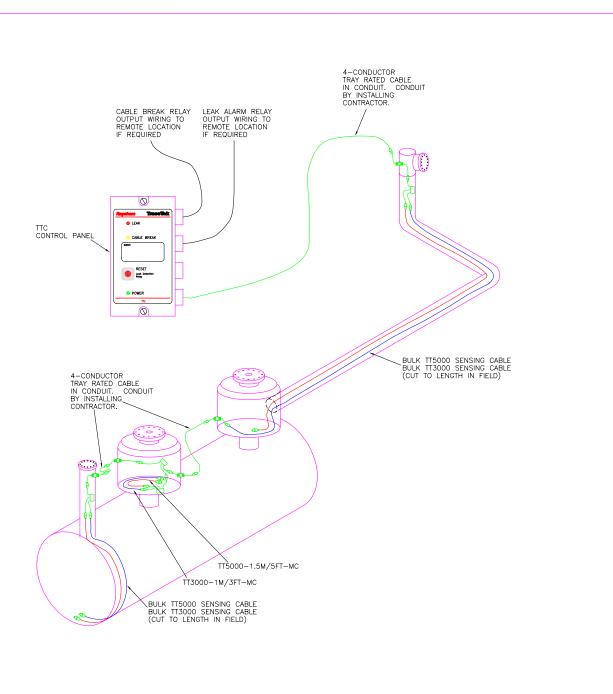

PROJECT NAME: UST FUELING SYSTEM
DOUBLE CONTAINMENT
UNATTENDED SYSTEM
NON-LOCATING PANEL DESCRIPTION:
TRACETEK
FUEL OIL/WATER
LEAK DETECTION SYSTEM
TYPICAL DRAWING ENGINEER: SCALE: DATE: NONE 3 JAN 2002 DRAWN BY: R. WARREN CALIFORNIA DETECTION SYSTEMS, INC. 17155 Von Karman Avenue Sulte 104 Irvine, CA 92614-0906 —Phone — (949)223-9800 Fax (949)223-9804

LEGEND
TRAY CABLE
TT5000 CABLE

TT-MET-MC

TT-MBC-MC

TT-PFT-MC

θ

•