


## TRACETEK ANALOG CURRENT TRANSDUCER

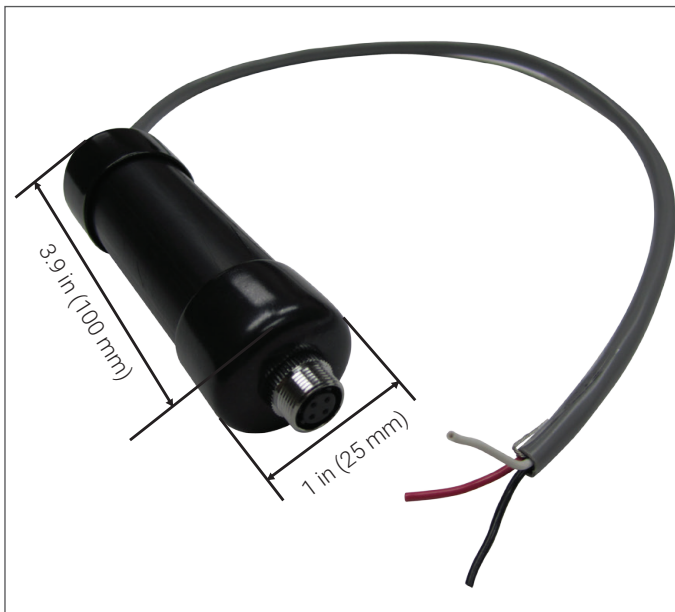

### PRODUCT OVERVIEW


nVent RAYCHEM TraceTek TT-TAR is a 2-wire, 4-20 mA current transducer for TraceTek sensor cable or TraceTek sensor probes. Virtually any of the TraceTek family of sensor cables and probes may be connected to the transducer. The TT-TAR is loop powered and no external source of power is required. For hazardous area installations, the TT-TAR is powered via an MTL5541 Repeater Power Supply (Galvanic Isolator). The amount of current that flows in the current loop between the MTL5541 and the TT-TAR is dependent on the condition/status of the sensor cable or sensor probes connected to the TT-TAR.

- 0 mA = Wire break between MTL5541 and TT-TAR
- 4 mA = Sensor cable/probe disconnected from TT-TAR or Sensor cable/probe damage
- 6-9 mA = Sensor cable/probe NORMAL
- > 18 mA = LEAK detected

TT-TAR does not indicate leak location. TT-TAR is designed to monitor point probes and limited amounts of sensor cable.

### Key Points

- 2-wire, loop powered, 4-20 mA current transducer for TraceTek sensor cable and probes
- Approved for hazardous areas when energized via an MTL5541 Repeater Power Supply (Galvanic Isolator)
- Magnitude of current indicates sensor cable/probe status: NORMAL, LEAK DETECTED, CABLE BREAK

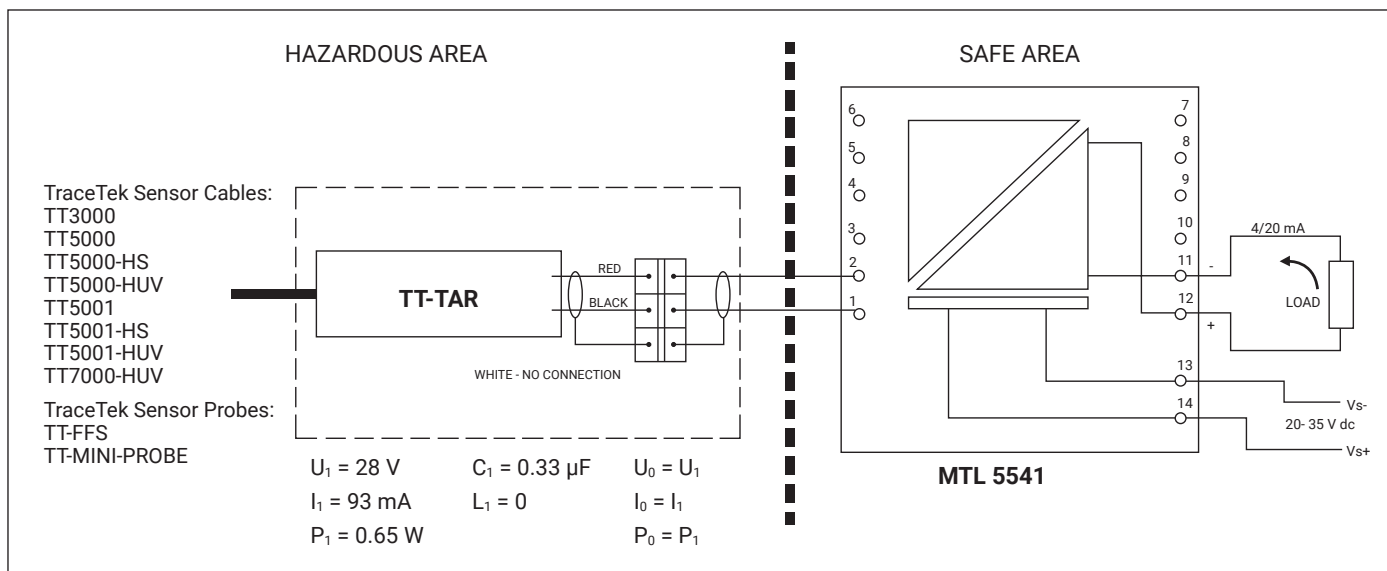

## PRODUCT DATA AND RESTRICTIONS

Dimensions	Length 100 mm (3.9 in) x 25 mm (1.0 in) diameter
Weight	Approximately 80 gm (0.18 lb)
Sensor Connector	TraceTek MC series -female
Current Loop Wire	1 m (39 in) 3 conductor, 22 AWG (red, black, white*) *Note: white wire is not used for TT-TAR
Operating Temperature Range	-40°C to 60°C (-40°F to 140°F)
Maximum Sensor Cable Length	250 m (820 ft)
Maximum Number of TT-MINI-PROBES (Use TT-MBC-MC-BLK to connect more than one probe)	10
Maximum Number of TT-FFS Fast Fuel Probes (Use TT-MBC-MC-BLK to connect more than one probe)	4

## APPROVALS

TT-TAR Unit	TT-TAR SYSTEM
Baseefa11ATEX0276X	Baseefa11Y0277
IECEX BAS 11.041X	IECEX BAS 11.0142
Ⓔ II1G	Ex ia IIA T4
Ex ia IIA T4 Ga (-40°C =< ta =< 60°C)	IEC/EN 60079-25:2010
IEC 60079-0:2011	
IEC 60079-11:2011	
EN 60079-11:2007	

### North America

Tel +1.800.545.6258  
 Fax +1.800.527.5703  
 thermal.info@nvent.com

### Europe, Middle East, Africa

Tel +32.16.213.511  
 Fax +32.16.213.604  
 thermal.info@nvent.com

### Asia Pacific

Tel +86.21.2412.1688  
 Fax +86.21.5426.3167  
 cn.thermal.info@nvent.com

### Latin America

Tel +1.713.868.4800  
 Fax +1.713.868.2333  
 thermal.info@nvent.com



nVent.com

Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**